


CANOPY SIDE SKIRT


Assembly Instructions

CONTENTS SUPPLIED

- (a.) Frame
- (b.) Fabric (side skirt)
- (c.) Clamps




STEP 1




Take two of the Black Clamps and clamp one around the back Frame Leg, just above the Leg Adjustment Joint. Do the same to the adjacent front leg.

STEP 2




The Side Skirt Rail should be in three pieces. Slide the smaller rail into the larger rail to create one long rail.

STEP 3

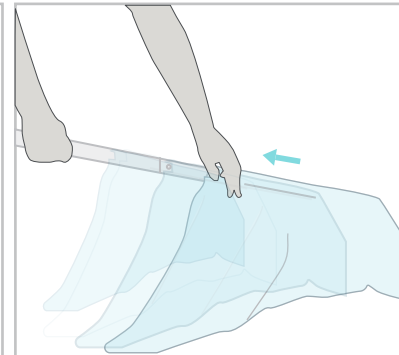


Slide the Side Skirt Rail through the Pole Pocket of the Side Skirt Graphic.

STEP 4




Attach both ends of the Side Skirt Rail into the clamps on the front and back Frame Legs. Tighten screw to secure.

STEP 5



Secure the Side Skirt Graphic to the Frame by attaching the Graphic's Velcro straps to the front and back Legs.

STEP 6



Repeat steps 1-5 for the other Side Skirt.



INCLEMENT WEATHER

CANOPY CAN WITHSTAND SUSTAINED WINDS UP TO 25MPH.

PLEASE BE SURE TO STAKE DOWN OR WEIGH DOWN

CANOPY TO PREVENT LIABILITY.

EXERCISE CAUTION TO PREVENT INJURY